

Electrochemistry

Electrochemistry is that branch of chemistry which deals with the study of production of electricity from energy released during spontaneous chemical reactions and the use of electrical energy to bring about non-spontaneous chemical transformations.

Conductors

Substances that allow electric current to pass through them are known as conductors. Certain materials called superconductors by definition have zero resistivity or infinite conductivity. e.g. ceramic materials and mixed oxides also show superconductivity at temperature as high as 150 K.

Metallic Conductors or Electronic Conductors

Substances which allow the electric current to pass through them by the movement of electrons are called metallic conductors, e.g. metals.

Electrolytic Conductors or Electrolytes

Substances which allow the passage of electricity through their fused state or aqueous solution and undergo chemical decomposition are called electrolytic conductors, e.g. aqueous solution of acids, bases and salts.

Electrolytes are of two types:

- (i) **Strong electrolytes** The electrolytes which dissociate completely into ions.
- (ii) **Weak electrolytes** The electrolytes which do not ionise completely in aqueous as well as in molten state.

Cell

Cells are the devices in which interconversion of electrical energy and chemical energy takes place.

A cell is made up of various components i.e. electrolytic solution (already discussed), salt-bridge and electrodes.

Salt-bridge

It is a U-shaped glass tube which contains agar-agar paste with NH_4NO_3 , KNO_3 or KCl as conducting electrolytes. **KCl is not used when electrode is made of Ag.** This salt-bridge is only used in electrochemical cell.

Electrodes

These are the materials that conduct electricity to or from the cell due to movement of electrons. It may be taken in any form like wire, rod, sheet etc.



Types of cell

Cells are of two basic types as discussed below

(i) **Electrochemical cell** In this cell chemical reaction (redox reactions) are carried out that result in production of electricity. It is also called voltaic or galvanic cell. One of the important example of this type of cells is Daniell cell.

(ii) **Electrolytic cell** In this cell electricity is used to produce non-spontaneous chemical changes. As there occurs, breaking down of a molecule with the help of electricity, the process is called **electrolysis**.


Electrochemical Cell and Electrolytic Cell

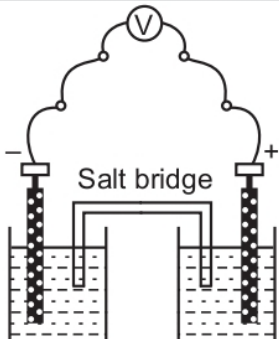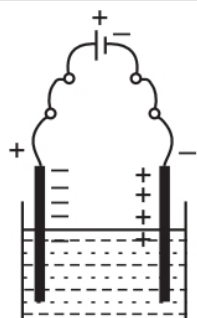Characteristics	Electrochemical cell (Galvanic cell)	Electrolytic cell
	 <p>Anode $M \rightarrow M^{n+} + ne^{-}$ Cathode $M^{n+} + ne^{-} \rightarrow M$</p>	
1. Definition	A device used to convert chemical energy into electrical energy.	A device used to carry out non-spontaneous chemical reactions by electrical energy.

Characteristics	Electrochemical cell (Galvanic cell)	Electrolytic cell
2. Assembly	It is combination of two half-cells, containing the same or different electrodes in the same or different electrolytes.	It is a single cell containing the same electrodes present in the same electrolyte.
3. Nature of electrodes	Anode is negative, cathode is positive.	Anode is positive, cathode is negative.
4. Movement of electrons	From anode to cathode in external circuit.	Electrons enter through cathode and leave by anode.
5. Spontaneity	Cell reaction is spontaneous	Cell reaction is non-spontaneous.
6. Salt bridge	Salt bridge is required	Salt bridge is not required.

A cell of almost constant emf is called **standard cell**. The most common is Weston standard cell.

General Representation of an Electrochemical Cell

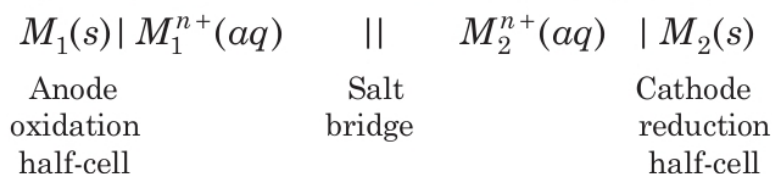

	Cathode	Anode
Sign	Positive due to consumption of electrons	Negative due to release of electrons
Reaction	Reduction	Oxidation
Movement of electrons	Into the cell	Out of cell

Other features of the electrochemical cell are

1. There is no evolution of heat.
2. The solution remains neutral on both sides.
3. The reaction and flow of electrons stops after sometime.


Daniell Cell

An electrochemical cell of zinc and copper metals is known as Daniell cell. This cell converts the chemical energy liberated during the redox reaction to electrical energy and has an electrical potential equal to 1.1 V.





When concentration of Zn^{2+} and Cu^{2+} ion has unity (1 mol dm^{-3}) such a device is called galvanic or voltaic cell.

It is represented as :

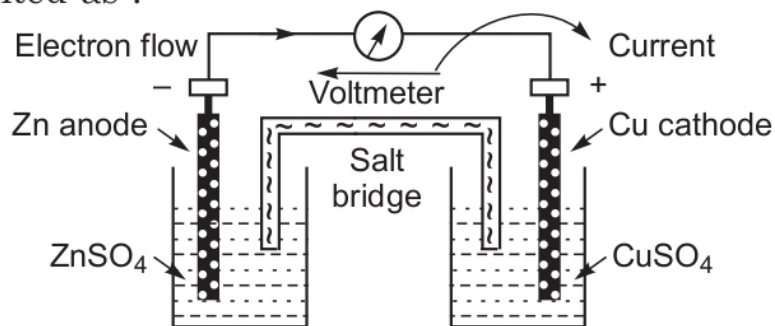

Cell representation,



By convention cathode is represented on the RHS and anode on the LHS.

Function of salt bridge

1. It completes the circuit and allows the flow of current.
2. It maintains the electrical neutrality on both sides. Salt-bridge generally contains solution of strong electrolyte such as KNO_3 , KCl , etc. KCl is preferred because the transport numbers of K^{+} and Cl^{-} are almost same.

Transport number or transference number The current flowing through an electrolytic solution is carried by the ions. The fraction of the current carried by an ion is called its transport number or transference number. Thus,

$$\text{Transport number of cation, } n_c = \frac{\text{current carried by cation}}{\text{total current}}$$

$$\text{Transport number of anion, } n_a = \frac{\text{current carried by anion}}{\text{total current}}$$

$$\text{Evidently } n_c + n_a = 1$$

Electrode Potential

When an electrode is in contact with the solution of its ions in a half-cell, it has a tendency to lose or gain electrons which is known as electrode potential. It is expressed in volts. It is an intensive property, *i.e.* independent of the amount of species in the reaction.

Oxidation potential The tendency to lose electrons in the above case is known as oxidation potential. Oxidation potential of a half-cell is inversely proportional to the concentration of ions in the solution.

Reduction potential The tendency to gain electrons in the above case is known as reduction potential. According to IUPAC convention, the reduction potential alone be called as the electrode potential unless it is specifically mentioned.

$$E_{\text{red}}^{\circ} = - E_{\text{oxidation}}^{\circ}$$

It is not possible to determine the absolute value of electrode potential. For this a reference electrode [NHE or SHE] is required. The electrode potential is only the difference of potentials between two electrodes that we can measure by combining them to give a complete cell.


Standard electrode potential The potential difference developed between metal electrode and solution of ions of unit molarity (1M) at 1 atm pressure and 25°C (298 K) temperature is called standard electrode potential. It is denoted by E° .

Reference Electrode



The electrode of known potential is called reference electrode. It may be primary reference electrode like hydrogen electrode or secondary reference electrode like calomel electrode.

Standard hydrogen electrode (SHE)

Standard hydrogen electrode (SHE), also known as normal hydrogen electrode (NHE), consists of platinum wire, carrying platinum foil coated with finely divided platinum black. The wire is sealed into a glass tube, placed in beaker containing 1 M HCl. The hydrogen gas at 1 atm pressure is bubbled through the solution at 298K. Half-cell is $\text{Pt} | \text{H}_2 (1 \text{ atm}) | \text{H}^+ (1 \text{ M})$

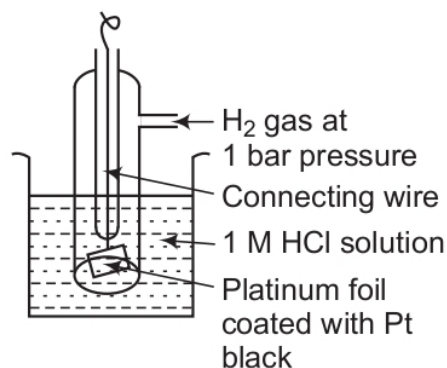

In SHE, at the surface of platinum, either of the following reaction can take place



The electrode potential of SHE has been fixed as zero at all temperatures.

Its main drawbacks are

1. It is difficult to maintain 1 atm pressure of H_2 gas.

- It is difficult to maintain H^+ ion concentration 1 M.
- The platinum electrode is easily poisoned by traces of impurities.

Hence, calomel electrodes are conveniently used as reference electrodes. It consists of mercury in contact with Hg_2Cl_2 (calomel) paste in a solution of KCl.

Electromotive Force (emf) of a Cell

It is the difference between the electrode potentials of two half-cells and cause flow of current from electrode at higher potential to electrode at lower potential. It is also the measure of free energy change. Standard emf of a cell,

$$E_{\text{cell}}^{\circ} = E_{\text{cathode}}^{\circ} - E_{\text{anode}}^{\circ} = E_{\text{right}}^{\circ} - E_{\text{left}}^{\circ} = E_{\text{red}}^{\circ} + E_{\text{oxi}}^{\circ}$$

Emf and Cell Potential

S.No.	Emf	Cell potential
1.	Potential difference between two electrodes when no current is flowing in the circuit is called emf.	The potential difference of the two half-cells when electric current flows through the cells is called cell potential.
2.	Emf is the maximum voltage which can be obtained from the cell.	It is always less than the maximum voltage obtainable from the cell.
3.	Emf is measured by a potentiometer.	It is measured by a voltmeter.

Electrochemical Series

It is the arrangement of electrodes in the increasing order of their standard reduction potentials.

Standard Electrode Potential at 298 K

Reaction (Oxidised form) + ne^-	→	Reduced form	E°/V
$F_2(g) + 2e^-$	→	$2F^-$	2.87
$Co^{3+} + e^-$	→	Co^{2+}	1.81
$H_2O_2 + 2H^+ + 2e^-$	→	$2H_2O$	1.78
$MnO_4^- + 8H^+ + 5e^-$	→	$Mn^{2+} + 4H_2O$	1.51
$Au^{3+} + 3e^-$	→	$Au(s)$	1.40
$Cl_2(g) + 2e^-$	→	$2Cl^-$	1.36
$Cr_2O_7^{2-} + 14H^+ + 6e^-$	→	$2Cr^{3+} + 7H_2O$	1.33
$O_2(g) + 4H^+ + 4e^-$	→	$2H_2O$	1.23



Reaction (Oxidised form) + ne^-	→	Reduced form	E°/V
$MnO_2(s) + 4H^+ + 2e^-$	→	$Mn^{2+} + 2H_2O$	1.23
$Br_2 + 2e^-$	→	$2Br^-$	1.09
$NO_3^- + 4H^+ + 3e^-$	→	$NO(g) + 2H_2O$	0.97
$2Hg^{2+} + 2e^-$	→	Hg_2^{2+}	0.92
$Ag^+ + e^-$	→	$Ag(s)$	0.80
$Fe^{3+} + e^-$	→	Fe^{2+}	0.77
$O_2(g) + 2H^+ + 2e^-$	→	H_2O_2	0.68
$I_2 + 2e^-$	→	$2I^-$	0.54
$Cu^+ + e^-$	→	$Cu(s)$	0.52
$Cu^{2+} + 2e^-$	→	$Cu(s)$	0.34
$AgCl(s) + e^-$	→	$Ag(s) + Cl^-$	0.22
$AgBr(s) + e^-$	→	$Ag(s) + Br^-$	0.10
$2H^+ + 2e^-$	→	$H_2(g)$	0.00
$Pb^{2+} + 2e^-$	→	$Pb(s)$	- 0.13
$Sn^{2+} + 2e^-$	→	$Sn(s)$	- 0.14
$Ni^{2+} + 2e^-$	→	$Ni(s)$	- 0.25
$Fe^{2+} + 2e^-$	→	$Fe(s)$	- 0.44
$Cr^{3+} + 3e^-$	→	$Cr(s)$	- 0.74
$Zn^{2+} + 2e^-$	→	$Zn(s)$	- 0.76
$2H_2O + 2e^-$	→	$H_2(g) + 2OH^-(aq)$	- 0.83
$Al^{3+} + 3e^-$	→	$Al(s)$	- 1.66
$Mg^{2+} + 2e^-$	→	$Mg(s)$	- 2.36
$Na^+ + e^-$	→	$Na(s)$	- 2.71
$Ca^{2+} + 2e^-$	→	$Ca(s)$	- 2.87
$K^+ + e^-$	→	$K(s)$	- 2.93
$Li^+ + e^-$	→	$Li(s)$	- 3.05

Applications of Electrochemical Series (ECS)

1. The lower the value of E° , the greater the tendency to form cation.



2. Metals placed below hydrogen in ECS replace hydrogen from dil acids but metals placed above hydrogen cannot replace hydrogen from dil acids.



3. Oxides of metals placed below hydrogen are not reduced by H_2 but oxides of iron and metals placed above iron are reduced by H_2 .

(a) SnO , PbO , CuO are reduced by H_2 .


(b) CaO , K_2O are not reduced by H_2 .

4. Reducing character increases down the series.
 5. Reactivity increases down the series.
 6. Determination of emf; emf is the difference of reduction potentials of two half-cells.

$$E_{\text{emf}} = E_{\text{RHS}} - E_{\text{LHS}}$$

If the value of emf is positive, the reaction takes place spontaneously, otherwise not.

7. Greater the reduction potential of a substance, higher is its oxidising power. (e.g. $\text{F}_2 > \text{Cl}_2 > \text{Br}_2 > \text{I}_2$)
 8. A negative value of standard reduction potential shows that it is the site of oxidation.
 9. Oxides of metals having $E_{\text{red}}^\circ \geq 0.79$ will be decomposed by heating to form O_2 and metal.

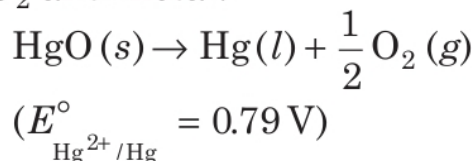

Nernst Equation

The relationship between the concentration of ions and electrode potential is given by Nernst equation.

$$M^{n+} + ne^- \longrightarrow M$$

$$E_{M^{n+}/M} = E_{M^{n+}/M}^\circ - \frac{2.303 RT}{nF} \log \frac{1}{[M^{n+}]}$$

or
$$E_{M^{n+}/M} = E_{M^{n+}/M}^{\circ} - \frac{0.0591}{n} \log \left[\frac{1}{M^{n+}} \right] \text{ (at 298 K)}$$

For an electrochemical cell,

$$aA + bB \longrightarrow cC + dD$$

$$E_{\text{cell}} = E_{\text{cell}}^{\circ} - \frac{2.303RT}{nF} \log \frac{[C]^c [D]^d}{[A]^a [B]^b}$$

Concentration of pure solids and liquids is taken as unity.

Nernst equation and K_c

\therefore At equilibrium, $E_{\text{cell}} = 0$

$$E_{\text{cell}}^{\circ} = \frac{0.0591}{n} \log K_c \text{ at 298K}$$

$$\Delta G^{\circ} = -nFE_{\text{cell}}^{\circ}$$

Here, ΔG° is the standard Gibbs free energy change.

Type of reaction	ΔG°	E_{cell}°	Type of cell
Spontaneous	-ve	+ve	Galvanic
Non-spontaneous	+ve	-ve	Electrolytic
Equilibrium	0	0	Dead battery

Relationship between free energy change and equilibrium constant

$$\Delta G^{\circ} = -2.303RT \log K_c$$

Concentration Cells

The cells in which both the electrodes are of the same type but the electrolytic solution have different concentration, are called concentration cells.

- (i) **Electrode concentration cells** Two hydrogen electrodes of different pressures are dipped in the same solution of electrolyte, e.g.

$$\text{Pt, H}_2(p_1) | \text{H}^+ | \text{H}_2(p_2) \text{Pt, } p_1 > p_2$$

$$E_{\text{cell}} = \frac{2.303RT}{nF} \log \frac{p_2}{p_1}$$

- (ii) **Electrolyte concentration cells** Electrodes are the same but electrolyte solutions have different concentrations, e.g.

$$\text{Zn} | \text{Zn}^{2+}(C_1) || \text{Zn}^{2+}(C_2) | \text{Zn, } C_2 > C_1$$

$$E_{\text{cell}} = \frac{2.303RT}{nF} \log \frac{C_2}{C_1} = \frac{0.0591}{n} \log \frac{C_2}{C_1}$$

Conductance (G)

It is the ease of flow of electric current through the conductor. It is reciprocal of resistance (R).

$$G = \frac{1}{R}, \text{ Units ohm}^{-1}, \text{ mhos or } \Omega^{-1}$$

Specific Conductivity (κ)

It is the reciprocal of specific resistance.

$$\kappa = \frac{1}{\rho} = \frac{l}{R \cdot a} = G \times \frac{l}{a} = G \times \text{cell constant } (G^*) \quad \left(\frac{l}{a} = \text{cell constant} \right)$$

Units of $\kappa = \Omega^{-1} \text{cm}^{-1} = \text{S cm}^{-1}$ ($\Omega^{-1} = \text{S}$ i.e. Siemens)

Unit of cell constant is cm^{-1} or m^{-1} .

┌ Specific conductivity decreases on dilution. This is because
concentration of ions per cc decreases upon dilution. ┐

Molar Conductivity (Λ_m)

The conductivity of all the ions produced when 1 mole of an electrolyte is dissolved in V mL of solution is known as molar conductivity.

It is related to specific conductance as

$$\Lambda_m = \frac{\kappa \times 1000}{M} \quad \text{where, } M = \text{molarity.}$$

Its units are $\Omega^{-1} \text{cm}^2 \text{mol}^{-1}$ or $\text{S cm}^2 \text{mol}^{-1}$.

Equivalent Conductivity (Λ_{eq})

The conducting power of all the ions produced when 1 g-equivalent of an electrolyte is dissolved in V mL of solution, is called equivalent conductivity. It is related to specific conductance as

$$\Lambda_{\text{eq}} = \frac{\kappa \times 1000}{N}$$

where, $N = \text{normality}$.

Its units are $\text{ohm}^{-1} \text{cm}^2 (\text{equiv}^{-1})$ or $\text{mho cm}^2 (\text{equiv}^{-1})$ or $\text{S cm}^2 (\text{g-equiv}^{-1})$.

Debye-Huckel Onsagar equation It gives a relation between molar conductivity, Λ_m at a particular concentration and molar conductivity, Λ_m at infinite dilution.

$$\Lambda_m = \Lambda_m^0 - A\sqrt{C}$$

where, A is a constant. It depends upon the nature of solvent, temperature and on the type of electrolyte, i.e. the charge on the cation and anion produced on the dissociation of the electrolyte in the solution. Thus, NaCl , CaCl_2 , MgSO_4 are known as 1-1, 2-1 and 2-2 electrolytes respectively. All electrolytes of a particular type have the same value for A .


Factors Affecting Conductivity

(i) **Nature of electrolyte** The strong electrolytes like KNO_3 , KCl , NaOH , etc. are completely ionised in aqueous solution and have high values of conductivity (molar as well as equivalent). The weak electrolytes are ionised to a lesser extent in aqueous solution and have lower values of conductivity (molar as well as equivalent).

(ii) **Concentration of the solution** The concentrated solutions of strong electrolytes have significant interionic attractions, which reduce the speed of ions and lower the value of Λ_m and Λ_{eq} . The dilution decreases such attractions and increases the value of Λ_m and Λ_{eq} . The limiting value, Λ_m^0 or Λ_{eq}^0 (the molar conductivity at zero concentration or at infinite dilution) can be obtained by extrapolating the graph.

In case of **weak electrolytes**, the degree of ionisation increases on dilution which increases

the value of Λ_m and Λ_{eq} . The limiting value Λ_m^0 cannot be obtained by extrapolating the graph. The limiting value, Λ_m^0 , for weak electrolytes is obtained by Kohlrausch law.

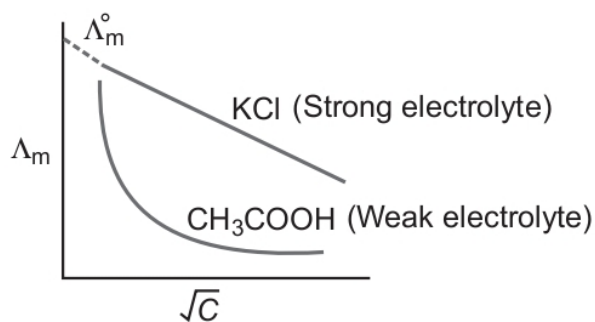

(iii) **Temperature** The increase of temperature decreases inter-ionic attractions and increases kinetic energy of ions and their speed. Thus, Λ_m and Λ_{eq} increase with temperature.

Kohlrausch's Law

At infinite dilution, the molar conductivity of an electrolyte is the sum of the ionic conductivities of the cations and anions, e.g. for A_xB_y .

$$\Lambda_m^0 (A_xB_y) = x\Lambda_{A^+}^0 + y\Lambda_{B^-}^0 \quad \text{or} \quad \Lambda_{\text{eq}}^0 = \Lambda_{A^+}^0 + \Lambda_{B^-}^0$$

(where, $\Lambda_{A^+}^0$ and $\Lambda_{B^-}^0$ are the limiting molar conductivity of the cation and anion respectively).

Applications

- (i) Determination of equivalent/molar conductivities of weak electrolytes at infinite dilution, e.g.

$$\Lambda_{\text{CH}_3\text{COOH}}^\infty = \Lambda_{\text{CH}_3\text{COONa}}^\infty + \Lambda_{\text{HCl}}^\infty - \Lambda_{\text{NaCl}}^\infty$$

$$\Lambda_{\text{NH}_4\text{OH}}^\infty = \Lambda_{\text{NH}_4\text{Cl}}^\infty + \Lambda_{\text{NaOH}}^\infty - \Lambda_{\text{NaCl}}^\infty$$

- (ii) Determination of degree of dissociation (α) of an electrolyte at a given dilution,

$$\alpha = \frac{\text{molar conductance at concentration 'C'}}{\text{molar conductance at infinite dilution}} = \frac{\Lambda_m^C}{\Lambda_m^\infty}$$

The **dissociation constant** (K) of the weak electrolyte at concentration C of the solution can be calculated by using the formula

$$K_c = \frac{C\alpha^2}{1 - \alpha}$$

where, α is the degree of dissociation of the electrolyte.

- (iii) Salts like BaSO_4 , PbSO_4 , AgCl , AgBr and AgI which do not dissolve to a large extent in water are called **sparingly soluble salts**.

The **solubility of a sparingly soluble salt can be calculated as**

$$\Lambda_m^\circ = \frac{\kappa \times 1000}{\text{solubility (in mol L}^{-1}\text{)}}$$

$$\text{Solubility (in mol L}^{-1}\text{)} = \frac{\kappa \times 1000}{\Lambda_m^\circ}$$

Electrolysis

It is the process of decomposition of an electrolyte when electric current is passed through either its aqueous solution or molten state.

- (i) In electrolytic cell both oxidation and reduction takes place in the same cell.
- (ii) Anode is positively charged and cathode is negatively charged, in electrolytic cell.
- (iii) During electrolysis of molten electrolyte, cations are liberated at cathode, while anions at the anode.
- (iv) When two or more ions compete at the electrodes, the ion with higher reduction potential gets liberated at the cathode while the ion with lower reduction potential at the anode.

For metals to be deposited on the cathode during electrolysis, the voltage required is almost the same as the standard electrode potential. However for liberation of gases, some extra voltage is required than the theoretical value of the standard electrode potential. The extra voltage thus required is called **over voltage** or **bubble voltage**.

How to Predict the Products of Electrolysis?

When an aqueous solution of an electrolyte is electrolysed, if the cation has higher reduction potential than water (-0.83 V), cation is liberated at the cathode (e.g. in the electrolysis of copper and silver salts) otherwise H_2 gas is liberated due to reduction of water (e.g. in the electrolysis of K, Na, Ca salts, etc.) Similarly if anion has higher oxidation potential than water (-1.23 V), anion is liberated at anode (e.g. Br^-) otherwise O_2 gas is liberated due to oxidation of water (e.g. in case of F^- , aqueous solution of Na_2SO_4 as oxidation potential of SO_4^{2-} is -0.2 V).

Discharge potential is defined as the minimum potential that must be applied across the electrodes to bring about the electrolysis and subsequent discharge of the ion on the electrode.

Faraday's Laws of Electrolysis

1. First law

The amount of the substance deposited or liberated at cathode is directly proportional to the quantity of electricity passed through an electrolyte.

$$W \propto I \times t = I \times t \times Z = Q \times Z$$

I = current in amp, t = time in sec,

Q = quantity of charge (coulomb)

Z is a constant known as electrochemical equivalent.

When $I = 1$ amp, $t = 1$ sec and then $Q = 1$ coulomb, then $w = Z$.

Thus, electrochemical equivalent is the amount of the substance deposited or liberated by passing 1A current for 1 sec (i.e. 1 coulomb, $I \times t = Q$)

2. Second law

When the same quantity of electricity is passed through different electrolytes, the amounts of the substance deposited or liberated at the electrodes are directly proportional to their equivalent weights. Thus,

$$\frac{\text{Mass of } A}{\text{Mass of } B} = \frac{\text{eq. wt. of } A}{\text{eq. wt. of } B} \quad \text{or} \quad \frac{w_1}{w_2} = \frac{E_1}{E_2} \Rightarrow \frac{Z_1 Q}{Z_2 Q} = \frac{E_1}{E_2}$$

Hence, electrochemical equivalent \propto equivalent weight.

Batteries

These are source of electrical energy which may have one or more cells connected in series. For a good quality battery, it should be reasonably light, compact and its voltage should not vary appreciably during its use.

Primary Batteries

In the primary batteries, the reaction occurs only once and after use over a period of time, battery becomes dead and cannot be reused again.


(i) Dry cell or Leclanche cell

Anode-Zinc container

Cathode-Graphite rod surrounded by MnO_2 powder

Electrolyte-Paste of $\text{NH}_4\text{Cl} + \text{ZnCl}_2$

Cathode reaction,



Anode reaction, $\text{Zn}(s) \longrightarrow \text{Zn}^{2+}(aq) + 2e^-$

Cell potential 1.25 V to 1.5 V

(ii) Mercury cell

Anode-Zn-Hg amalgam

Cathode-Paste of ($\text{HgO} + \text{C}$)

Electrolyte-Moist paste of KOH-ZnO

Cathode reaction, $\text{HgO}(s) + \text{H}_2\text{O}(l) + 2e^- \longrightarrow \text{Hg}(l) + 2\text{OH}^-$

Anode reaction, $\text{Zn}(\text{Hg}) + 2\text{OH}^-aq \longrightarrow \text{ZnO}(s) + \text{H}_2\text{O}(l) + 2e^-$

Net reaction, $\text{Zn}(\text{Hg}) + \text{HgO}(s) \longrightarrow \text{ZnO}(s) + \text{Hg}(l)$

Cell potential 1.35 V and remains constant during its life as the net reaction does not involve any ion in solution whose concentration can change during its life time.

Secondary Batteries

These cells can be recharged and can be used again and again, e.g.

(i) Lead Storage battery


Anode-Spongy lead

Cathode-Grid of lead packed with PbO_2

Electrolyte-38% H_2SO_4 by mass

Anode reaction, $\text{Pb}(s) + \text{SO}_4^{2-}(aq) \longrightarrow \text{PbSO}_4(s) + 2e^-$

Cathode reaction,



Net reaction,



When recharged the cell reactions are reversed.

(ii) Nickel-Cadmium storage cell

Anode-Cadmium


Cathode-Metal grid containing NiO₂

Electrolyte-KOH solution

Anode reaction,



Cathode reaction,



Net reaction,



$$\text{Cell potential} = 1.4 \text{ V}$$

Nickle-cadmium cell has longer life than the lead storage cell.

Fuel Cells

Galvanic cells which use energy of combustion of fuels like H₂, CH₄, CH₃OH, etc., as the source to produce electrical energy are called fuel cells. The fuel cells are pollution free and have high efficiency. Fuel cell produces electricity with an efficiency of about 70% as compared to thermal plants whose efficiency is about 40%.

Hydrogen-Oxygen Fuel Cell

Electrodes-Made of porous graphite impregnated with catalyst (Pt, Ag or a metal oxide).

Electrolyte-Aqueous solution of KOH or NaOH

Oxygen and hydrogen are continuously fed into the cell.


Oxidation Half-cell reaction,



Reduction half-cell reaction,



Net reaction,



EMF of the cell 1 V.

Thermodynamic efficiency of a fuel cell,

$$\eta = \frac{\Delta G}{\Delta H} \times 100 = \frac{-nF E_{\text{cell}}}{\Delta H}$$

Corrosion

Slow formation of undesirable compounds such as oxides, sulphides or carbonates at the surface of metals by reaction with moisture and other atmospheric gases is known as corrosion.

Factors Affecting Corrosion

- (i) Reactivity of metals
- (ii) Presence of moisture and atmospheric gases like CO_2 , SO_2 , etc.
- (iii) Presence of impurities
- (iv) Strains in the metal
- (v) Presence of electrolyte



Rusting of Iron-Electrochemical Theory

An electrochemical cell, also known as corrosion cell, is developed at the surface of iron.


Anode-Pure iron

Cathode-Impure surface

Electrolyte,



At surface,



Rusting of iron can be prevented by the following methods:

- (i) Barrier protection through coating of paints or electroplating.
- (ii) Through galvanisation or coating of surface with tin metal.
- (iii) By the use of antirust solutions (bis phenol).
- (iv) By cathodic protection in which a metal is protected from corrosion by connecting it to another metal which is more easily oxidised.